

**The original, patented underfloor heating and uncoupling membrane solution. Fast track substrate preparation and flexible electric underfloor heating.**

### The Solution For...

- ① Renovation of old screeds
- ② New anhydrite screeds
- ③ Additional zone heating over wet UFH


### The Vario PRO heating cable

The TwistedTwin Vario PRO heating cable is installed in the membrane, in areas where heat is required. You can then begin to tile directly over the ProMat and heating cable.

Our superior TwistedTwin cable is unique in the UK. You'll find marginally thinner cables, but you won't find better quality.

### The Vario ProMat membrane

Thanks to the uncoupling protection and crack isolating properties of the Vario ProMat membrane, it is possible to install an electric underfloor heating system over a variety of difficult substrates such as chipboard, green or cracked screeds.

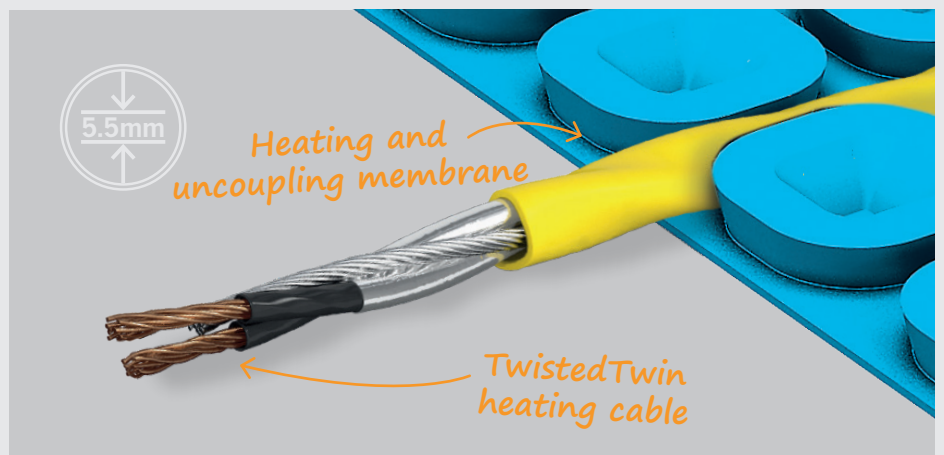

#### INCLUDED IN THE RANGE

Vario ProMat Membrane  
Vario PRO Sealing Tape  
Vario PRO Heating Cables

#### WHAT'S IN THE BOX?

Vario PRO Heating Cable  
Installation guide



### 5 Reasons for Vario ProMat

- ✓ Simple, fast cable installation
- ✓ Uncoupling properties
- ✓ Waterproofing membrane
- ✓ Only 5.5mm thick
- ✓ No special adhesives required\*

\*Must be a polymer modified cement based flexible adhesive

### Features and benefits

- ✓ Simple underfloor heating installation
- ✓ Uncoupling properties
- ✓ Waterproofing membrane
- ✓ Low buildup of just 5.5mm
- ✓ Lifetime warranty
- ✓ Safe for use in wet areas

If your substrate is not compatible with cement based flexible tile adhesive it is possible to adhere Vario ProMat to the substrate using an acrylic based emulsion adhesive. Check manufacturer's guidelines on correct substrate preparation to ensure a strong bond is achieved.

#### Vario™ PRO Heating Cable

STOCK NO	AREA M2 (130W/M2)	LENGTH M	OUTPUT W
109012	1.14	12	150
109018	1.71	18	225
109025	2.38	25	300
109031	3.04	31	375
109037	3.52	37	450
109050	4.75	50	600
109062	5.80	61	750
109075	7.13	75	900
109100	9.50	100	1200
109125	11.88	125	1500
109150	14.25	150	1800
109200	19.00	200	2400


The areas detailed in the table above are designed to give an output of 130W/m<sup>2</sup> (3 notches spacing)

#### Vario™ ProMat Membrane

STOCK NO	SIZE M	AREA M2
109500	15.0 x 1.0	15

#### Vario™ ProMat Sealing Tape

STOCK NO	SIZE M
109510	50

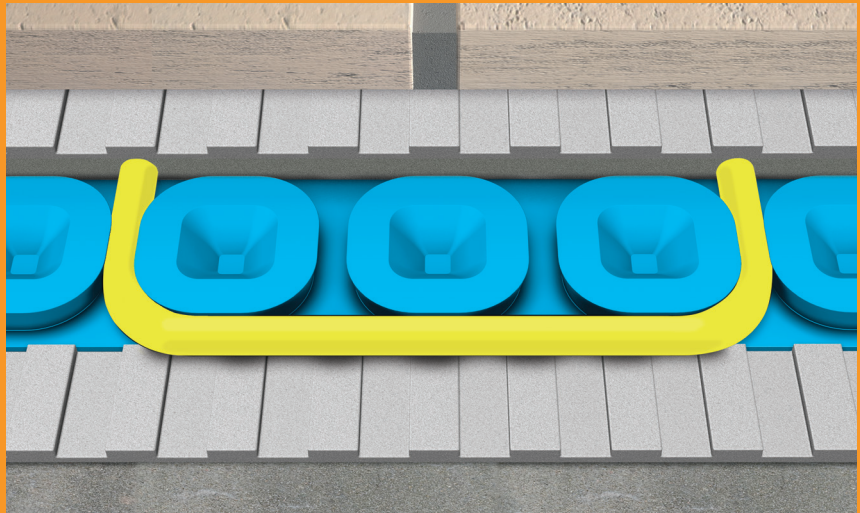

### Hassle free tiling on green or cracked screeds

Vario PRO is designed to provide underfloor heating and fast track preparation for cracked concrete substrates, chip board floors and green screeds that have not fully cured. The matting absorbs lateral movement resulting in a crack free tiled floor.



### Ideal for use in small or awkward areas

With the Vario ProMat membrane and heating cable system, you can choose exactly where you want to have your heating system. Install the uncoupling mat over the entire floor and lay heating cables where you want to feel it.

#### CONTACT US ONLINE



Browse our full product range, watch videos, download product literature and get a quote, all on the Thermogroup UK website.

[www.thermogroupuk.com](http://www.thermogroupuk.com)

#### CONTACT US BY PHONE



Got a question or query?  
Call our UK support line free from your land line. Open 07:30 – 16:30 Mon - Fri

0800 019 5899

#### CONTACT US BY MAIL



Tell your satnav where to find us or just write us a letter to say hello!

**Thermogroup UK, Bridge House,  
Hop Pocket Lane, Paddock Wood,  
Kent. TN12 6DQ.**